



2016.24.006.

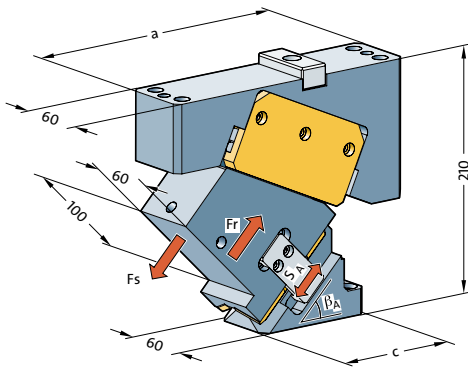

2016.24.008.

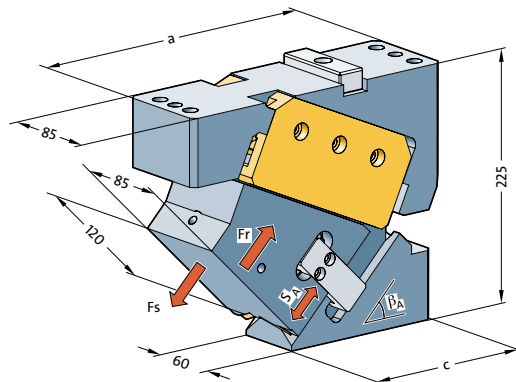

Bestell-Nummer Order No.	max. Schieberhub Max. Cam Stroke	Schieber- arbeitswinkel Working angle			Max. Schieberarbeitskraft (kN) Max. working force	Abstreifkraft (kN) Return force
	S_A	β_A	a	c	F_s	F_r
2016.24.006.00.2000.00	19,28	0°	205	155	136	1,7
2016.24.006.05.2000.00	21,29	5°		150	137	
2016.24.006.10.2000.00	21,54	10°		145	138	1,5
2016.24.006.15.2000.00	23,79	15°		140	139	
2016.24.006.20.2000.00	24,46	20°			140	1,3
2016.24.006.25.2000.00	27,12	25°		125	141	
2016.24.006.30.2000.00	30,00	30°			142	
2016.24.006.35.2000.00	31,72	35°		115	143	1,1
2016.24.006.40.2000.00	35,49	40°	220	110		
2016.24.006.45.2000.00	38,45	45°	235	105		0,9
2016.24.006.50.2000.00	43,86	50°	220		142	
2016.24.006.55.2000.00	49,15	55°				0,7
2016.24.006.60.2000.00	57,96	60°		92		
2016.24.006.65.2000.00	68,57	65°		85		0,4
2016.24.006.70.2000.00	70,60	70°			141	0,2
2016.24.006.75.2000.00	76,10	75°	235	80		
2016.24.008.00.1000.00	30,85	0°	255	175	230	3,1
2016.24.008.05.1000.00	34,07	5°		170		
2016.24.008.10.1000.00	34,46	10°		160		2,8
2016.24.008.15.1000.00	38,07	15°		155		
2016.24.008.20.1000.00	41,90	20°				
2016.24.008.25.1000.00	43,38	25°	285		229	2,4
2016.24.008.30.1000.00	48,00	30°				
2016.24.008.35.1000.00	50,75	35°				2,0
2016.24.008.40.1000.00	56,79	40°			237	
2016.24.008.45.1000.00	42,30	45°	265	150	245	1,5
2016.24.008.50.1000.00	48,24	50°		135	253	
2016.24.008.55.1000.00	54,06	55°			261	1,2
2016.24.008.60.1000.00	63,75	60°			269	
2016.24.008.65.1000.00	75,42	65°		126	277	0,8
2016.24.008.70.1000.00	95,02	70°	275	109	285	
2016.24.008.75.1000.00	95,13	75°			293	0,4