
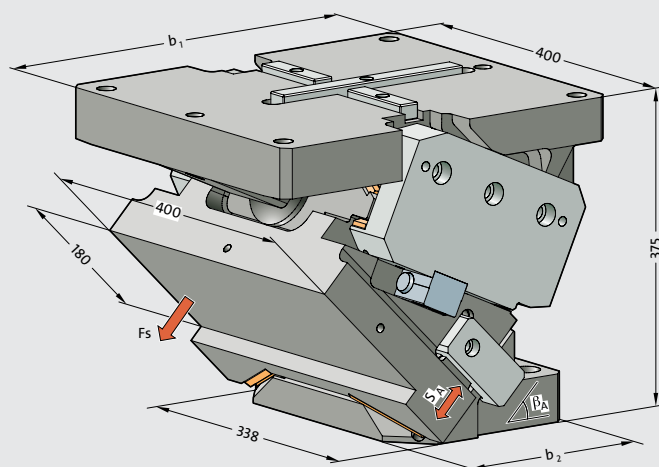


2016.24.040.□□.2000.00

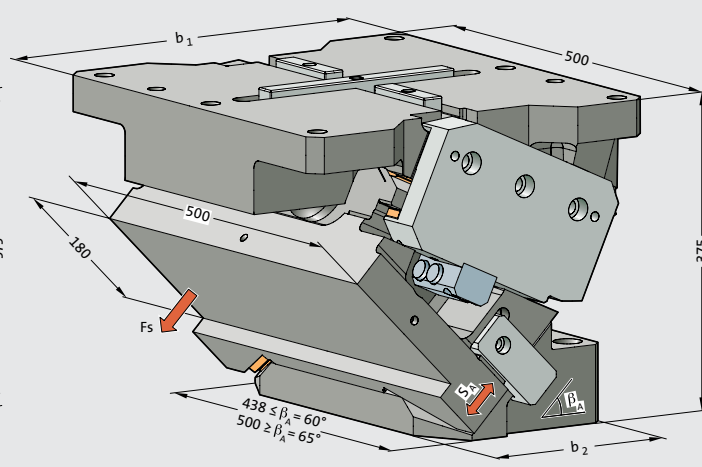

2016.24.050.□□.2000.00

Bestell-Nummer
order N°Schieber-
arbeitswinkel
working anglemax.
Schieberhub
max. working strokemax.
Schieberkraft
max. working forceAufspannfläche oben
mounting
surface topAufspannfläche unten
mounting
surface bottom

	β_A	S_A	F_S	b_1 Länge/length	b_2 Länge/length
2016.24.040.00.2000.00	0°	37,3 mm	1055 kN	415 mm	280 mm
2016.24.040.05.2000.00	5°	41,2 mm	1055 kN	415 mm	280 mm
2016.24.040.10.2000.00	10°	41,7 mm	1054 kN	415 mm	255 mm
2016.24.040.15.2000.00	15°	46,0 mm	1054 kN	415 mm	255 mm
2016.24.040.20.2000.00	20°	50,6 mm	1054 kN	415 mm	245 mm
2016.24.040.25.2000.00	25°	52,4 mm	1054 kN	415 mm	260 mm
2016.24.040.30.2000.00	30°	58,2 mm	1054 kN	415 mm	250 mm
2016.24.040.35.2000.00	35°	61,3 mm	1054 kN	415 mm	237 mm
2016.24.040.40.2000.00	40°	68,6 mm	1054 kN	415 mm	230 mm
2016.24.040.45.2000.00	45°	74,3 mm	1054 kN	450 mm	225 mm
2016.24.040.50.2000.00	50°	84,8 mm	1053 kN	450 mm	215 mm
2016.24.040.55.2000.00	55°	95,0 mm	1053 kN	450 mm	226 mm
2016.24.040.60.2000.00	60°	112,1 mm	1053 kN	450 mm	230 mm
2016.24.040.65.2000.00	65°	102,9 mm	1053 kN	450 mm	242 mm
2016.24.040.70.2000.00	70°	127,1 mm	1053 kN	450 mm	226 mm
2016.24.040.75.2000.00	75°	114,2 mm	1052 kN	450 mm	214 mm
2016.24.050.00.2000.00	0°	37,28 mm	1155 kN	415 mm	266 mm
2016.24.050.05.2000.00	5°	41,17 mm	1155 kN	415 mm	268 mm
2016.24.050.10.2000.00	10°	41,64 mm	1155 kN	415 mm	254 mm
2016.24.050.15.2000.00	15°	46,00 mm	1155 kN	415 mm	255 mm
2016.24.050.20.2000.00	20°	50,56 mm	1155 kN	415 mm	246 mm
2016.24.050.25.2000.00	25°	52,42 mm	1155 kN	415 mm	259 mm
2016.24.050.30.2000.00	30°	58,00 mm	1155 kN	415 mm	250 mm
2016.24.050.35.2000.00	35°	61,32 mm	1155 kN	415 mm	237 mm
2016.24.050.40.2000.00	40°	68,62 mm	1155 kN	415 mm	232 mm
2016.24.050.45.2000.00	45°	74,34 mm	1155 kN	455 mm	225 mm
2016.24.050.50.2000.00	50°	84,79 mm	1155 kN	450 mm	215 mm
2016.24.050.55.2000.00	55°	95,02 mm	1155 kN	450 mm	226 mm
2016.24.050.60.2000.00	60°	112,05 mm	1155 kN	450 mm	228 mm
2016.24.050.65.2000.00	65°	102,85 mm	1155 kN	450 mm	245 mm
2016.24.050.70.2000.00	70°	127,09 mm	1155 kN	450 mm	219 mm
2016.24.050.75.2000.00	75°	114,15 mm	1155 kN	450 mm	208 mm