


2016.24.060.□□.2000.00

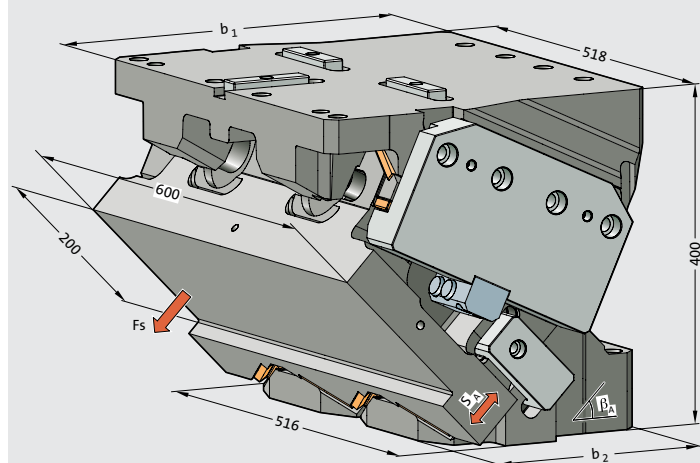

Bestell-Nummer order N°	Schieber- arbeitswinkel working angle	max. Schieberhub max. working stroke	max. Schieberkraft max. working force	Aufspannfläche oben mounting surface top	Aufspannfläche unten mounting surface bottom
	β_A	S_A	F_S	b_1 Länge/length	b_2 Länge/length
2016.24.060.00.2000.00	0°	37,28 mm	1202 kN	385 mm	255 mm
2016.24.060.05.2000.00	5°	41,17 mm	1202 kN	385 mm	258 mm
2016.24.060.10.2000.00	10°	41,64 mm	1202 kN	385 mm	245 mm
2016.24.060.15.2000.00	15°	46,00 mm	1202 kN	385 mm	245 mm
2016.24.060.20.2000.00	20°	50,56 mm	1202 kN	380 mm	260 mm
2016.24.060.25.2000.00	25°	52,42 mm	1202 kN	380 mm	250 mm
2016.24.060.30.2000.00	30°	58,00 mm	1202 kN	400 mm	250 mm
2016.24.060.35.2000.00	35°	61,32 mm	1202 kN	415 mm	280 mm
2016.24.060.40.2000.00	40°	68,62 mm	1202 kN	435 mm	275 mm
2016.24.060.45.2000.00	45°	74,34 mm	1202 kN	435 mm	265 mm
2016.24.060.50.2000.00	50°	84,79 mm	1202 kN	455 mm	225 mm
2016.24.060.55.2000.00	55°	95,02 mm	1202 kN	455 mm	215 mm
2016.24.060.60.2000.00	60°	112,05 mm	1202 kN	455 mm	215 mm
2016.24.060.65.2000.00	65°	102,85 mm	1202 kN	495 mm	185 mm
2016.24.060.70.2000.00	70°	127,09 mm	1202 kN	495 mm	180 mm
2016.24.060.75.2000.00	75°	114,15 mm	1202 kN	495 mm	175 mm