


Steuerbare Gasdruckfedern 24°-Konus-Verschraubungen (DIN 2353/DIN EN ISO 8434-1)

2480.00.26.03


Anschlussverschraubung-G¹/₈



1) Eolastic-Dichtung ED

2480.00.26.04


Anschlussverschraubung-G¹/₄



1) Eolastic-Dichtung ED

2480.00.26.21


schwenkbare
45°-Verschraubung,
komplett

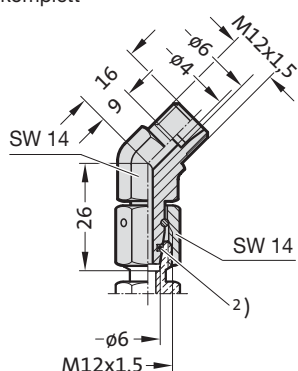

2) O-Ring

2480.00.26.22


schwenkbare
90°-Verschraubung,
komplett

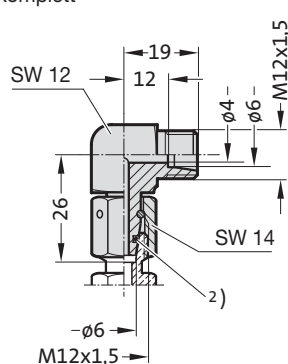

2) O-Ring

2480.00.26.23


schwenkbare
L-Verschraubung,
komplett

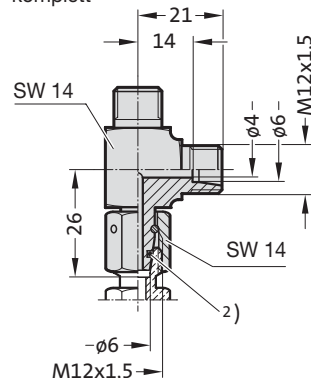

2) O-Ring

2480.00.26.24


schwenkbare
T-Verschraubung,
komplett

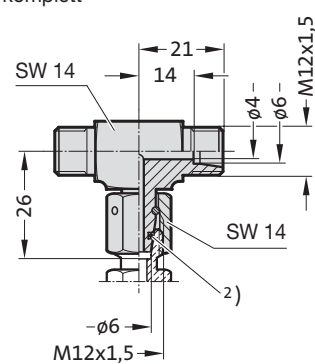

2) O-Ring


2480.00.26.25

Adapter gerade
Schlauch-Schlauch




2480.00.26.26

Adapter, 90°
Schlauch-Schlauch



2480.00.26.27

Adapter, T
Schlauch-Schlauch



2480.00.26.28

Adapter, K
Schlauch-Schlauch

