


LOCATING BOLT

LOCATING BOLT, THREADED



2441.5.

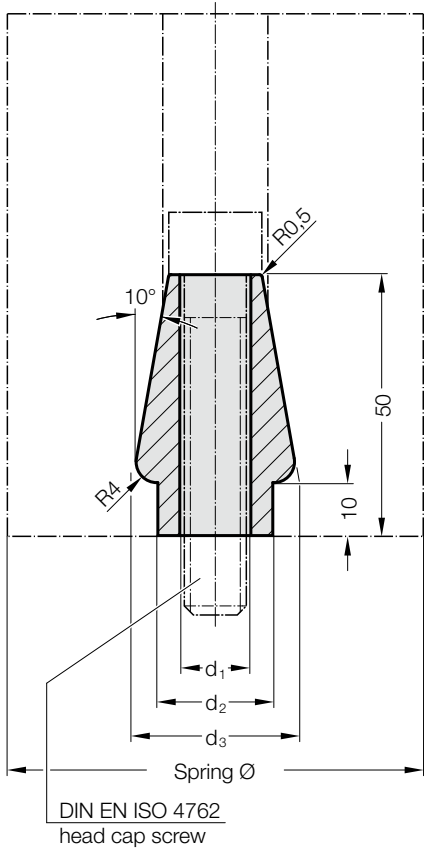

2441.5.


Locating bolt

Order No	Spring ø	d ₁	d ₂	d ₃	Socket cap screw
					DIN EN ISO 4762
2441.5.10	63	11	18	28	M10x65
2441.5.12	80 100	13.5	22	32	M12x70
2441.5.16	125	17.5	28	38	M16x70

Note:
Elastomeric round springs are positioned and secured in place by the locating bolts.
Screws are not included.



2441.6.

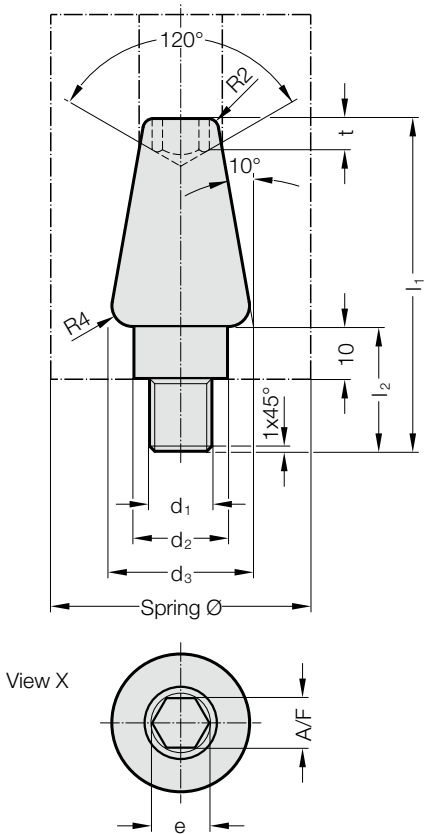

2441.6.

Locating bolt, threaded

Spring									
Order No	ø	d ₁	d ₂	d ₃	l ₁	l ₂	SW	e	t
2441.6.12	63	M12	18	28	64	24	10	11.4	6
2441.6.16	80	100	M16	22	32	68	28	10	11.4
2441.6.20	125	M20	28	38	72	32	14	16	8

Note:
Elastomeric round springs are positioned and secured in place by the locating bolts.