


GAS SPRINGS ACCESSORIES

DIRECT CONNECTION DIMENSIONS

24°-CONE THREADED JOINT (DIN 2353 / DIN EN ISO 8434-1)

2480.00.25.12.01

Hose clamp for gauging hose
DN5 (Ø11 mm)




Material: Polyamide

Note:
Supplied without screws

2192.50.04.012

Self-tapping screw
A M4x12 DIN 7516



Note:
self-tapping,
Diameter of hole for self-tapping
screw = 3.6 mm

2480.00.23.13.

Anti-suff spiral
for subsequent installation over hoses and tubing



Order No.	l in mm
2480.00.23.13.0001	1000
2480.00.23.13.0002	2000
2480.00.23.13.0005	5000
2480.00.23.13.0010	10000

Inner ø 7 mm
max.

For hose external ø 5-11 mm
-30°C up to

Temperature range +100°C


Material:

Polyamide


Description:

The anti-suff spiral is used to protect against abrasion, is resistant to air, water, oil, hydraulic fluids petrol and other liquids.


Direct connection
with 45°-elbow adaptor
2480.00.26.21

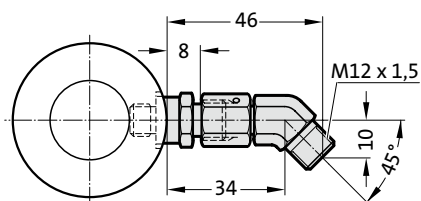


Direct connection
hose straight
adaptor 2480.00.26.03

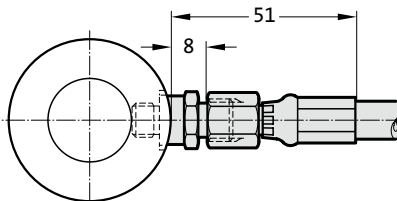


Direct connection
with 90° elbow adaptor
2480.00.26.22

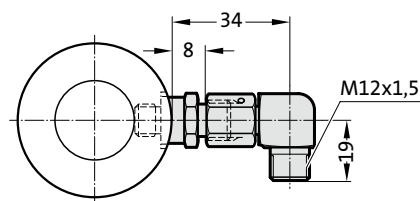


Direct connection
45° hose with
adaptor 2480.00.26.03

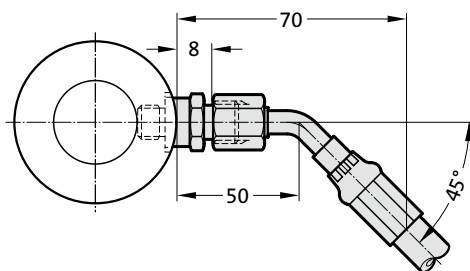

Direct connection
with L-coupling
2480.00.26.23

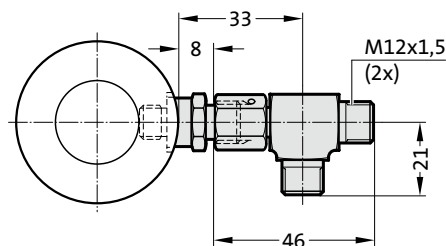

Direct connection
90° hose with
adaptor 2480.00.26.03

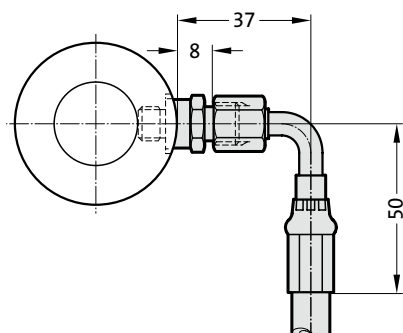

Direct connection
with T-coupling
2480.00.26.24

