
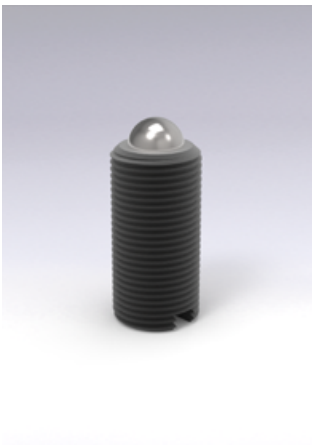


SPRING PLUNGER, WITH SPRING LOADED BALL, WITH SLOT, INCREASED SPRING FORCE

2471.02.



2471.02. Spring plunger, with spring loaded ball, with slot, increased spring force

Order No	d ₁	l	s	d ₂	Spring force [N]	
					initial	final
2471.02.005	M5	12	0.9	3	15	22
2471.02.006	M6	14	1	3.5	19	28
2471.02.008	M8	16	1.5	4.5	36	62
2471.02.010	M10	19	2	6	57	104
2471.02.012	M12	22	2.5	8	61	110
2471.02.016	M16	24	3.5	10	68	142
2471.02.020	M20	30	4.5	12	84	166
2471.02.024	M24	34	5.5	15	127	237

Material:

Sleeve: Free machining steel, burnished

Ball: Hardened ball bearing steel

Spring: Nirosta


Note:

For locking and for pressing upwards or downwards.

Temperature operating range: max. 250°C

Identification of increased spring force by two longitudinal marks on the sleeve.

2471.32.



2471.32. Spring plunger, with spring loaded ball, with slot, increased spring force

Order No	d ₁	l	s	d ₂	Spring force [N]	
					initial	final
2471.32.005	M5	12	0.9	3	15	22
2471.32.006	M6	14	1	3.5	19	28
2471.32.008	M8	16	1.5	4.5	36	62
2471.32.010	M10	19	2	6	57	104
2471.32.012	M12	22	2.5	8	61	110
2471.32.016	M16	24	3.5	10	68	142
2471.32.020	M20	30	4.5	12	84	166
2471.32.024	M24	34	5.5	15	127	237

Material:

Sleeve: Nirosta 1.4305

Ball: Nirosta hardened

Spring: Nirosta

Note:

For locking and for pressing upwards or downwards.

Temperature operating range: max. 250°C

Identification of increased spring force by two longitudinal marks on the sleeve.