

SPRING PLUNGER, WITH SPRING LOADED PIN AND SEAL, WITH HEXAGON SOCKET, STANDARD SPRING FORCE




Material:

Sleeve: Free machining steel, burnished
Pin: Free machining steel hardened, burnished
Spring: Nirosta

Note:

For locking and for pressing upwards or downwards. The seal prevents the ingress of liquids into the forcing pin. Assembly and dismantling using hexagon socket key and slotted screwdriver.
Temperature operating range: -30°C up to 80°C

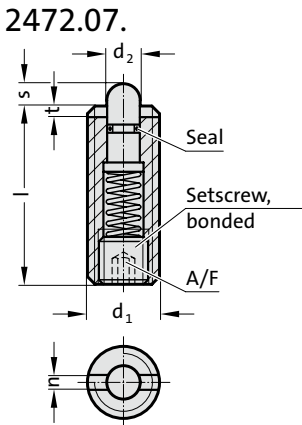

2472.07. Spring plunger, with spring loaded pin and seal, with hexagon socket, standard spring force

Order No	d ₁	d ₂	l	n	s	t	SW	Spring force [N]	
								initial	final
2472.07.008	M8	3.8	26	1.5	3	1.4	2.5	9	24
2472.07.010	M10	4	28	1.5	3.5	1.4	3	15	30
2472.07.012	M12	6	35	2.7	4	2	4	24	50
2472.07.016	M16	7.5	40	3.2	5	2.5	5	36	58




Material:

Sleeve: Inox 1.4305
Pin: Inox 1.4305
Spring: Nirosta

Note:

For locking and for pressing upwards or downwards. The seal prevents the ingress of liquids into the forcing pin. Assembly and dismantling using hexagon socket key and slotted screwdriver.
Temperature operating range: -30°C up to 80°C

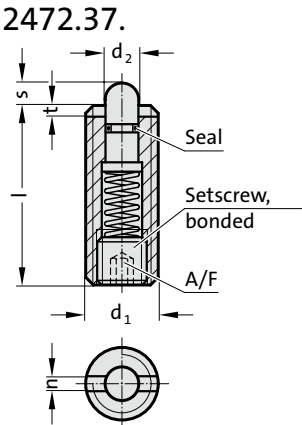

2472.37. Spring plunger, with spring loaded pin and seal, with hexagon socket, standard spring force

Order No	d ₁	d ₂	l	n	s	t	SW	Spring force [N]	
								initial	final
2472.37.008	M8	3.8	26	1.5	3	1.4	2.5	9	24
2472.37.010	M10	4	28	1.5	3.5	1.4	3	15	30
2472.37.012	M12	6	35	2.7	4	2	4	24	50
2472.37.016	M16	7.5	40	3.2	5	2.5	5	36	58