

Mounting example

Order separately:
2478.20.12.23
Lifter rail

40


$\varnothing 55^{H7}$

$\varnothing 40_{f7}$

Order separately:
2478.20.15.24.
Holding sleeve

$\varnothing 47^{+0.3}_{-0}$

$\varnothing 52^{+0.1}_{-0}$

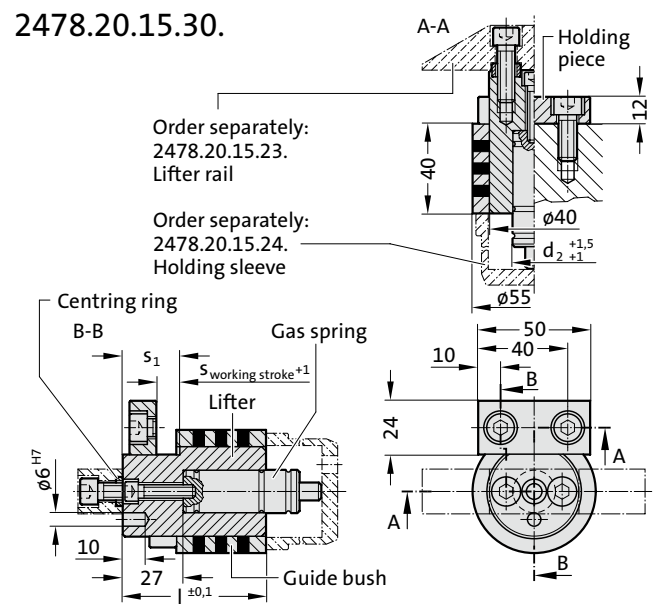

- 2478.20.15.23.: Lifter rail
- 2478.20.15.24.: Holding sleeve

Order No	d_2	l	$S_{working\ stroke}$	s_1	Gas spring
2478.20.15.30.14.9	19	64	9	25	2482.74.00090.010.2
2478.20.15.30.24.9	25	64	9	25	2480.21.00200.010
2478.20.15.30.14.14	19	68.5	13.5	29.5	2482.74.00090.015.2
2478.20.15.30.24.14	25	68.5	13.5	29.5	2480.21.00200.015
2478.20.15.30.14.23	19	77.5	22.5	38.5	2482.74.00090.025.2
2478.20.15.30.24.23	25	77.5	22.5	38.5	2480.21.00200.025
2478.20.15.30.14.34	19	89	34	50	2482.74.00090.038.2
2478.20.15.30.24.34	25	89	34	50	2480.21.00200.038
2478.20.15.30.14.45	19	100	45	63	2482.74.00090.050.2
2478.20.15.30.24.45	25	100	45	63	2480.21.00200.050
2478.20.15.30.14.59	19	113.5	58.5	74.5	2482.74.00090.063.2
2478.20.15.30.24.59	25	113.5	58.5	74.5	2480.21.00200.063
2478.20.15.30.14.75	19	130	75	91	2482.74.00090.080.2
2478.20.15.30.24.75	25	130	75	91	2480.21.00200.080
2478.20.15.30.14.95	19	150	95	111	2482.74.00090.100.2
2478.20.15.30.24.95	25	150	95	111	2480.21.00200.100
2478.20.15.30.14.120	19	175	120	136	2482.74.00090.125.2
2478.20.15.30.24.120	25	175	120	136	2480.21.00200.125