




GAS SPRING WITH MALE FIXING THREAD, SMALL MOUNTING HEIGHT

Note:
Initial spring force at 150 bar = 250 daN

Order No for spare parts kit: 2480.12.00250

Pressure medium: Nitrogen N₂
Max. filling pressure: 150 bar
Min. filling pressure: 50 bar
Working temperature: 0°C to +80°C
Temperature related force increase: ± 0.3%/°C
Max. recommended extensions per minute:
approx. 80 to 100 (at 20°C)
Max. piston speed: 1.6 m/s


2480.82.00250.

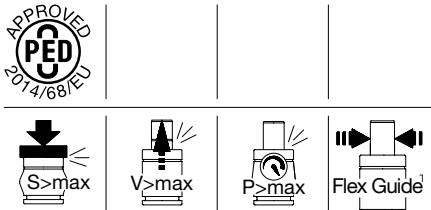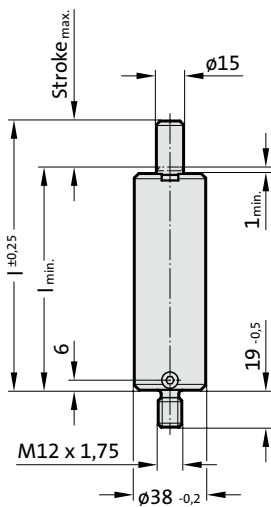


2480.82.00250.
Gas spring with male fixing thread, small mounting height

Order No	Stroke _{max.} (s)	l _{min.}	l
2480.82.00250.013	12.7	62.7	75.4
2480.82.00250.025	25	75	100
2480.82.00250.038	38.1	88.1	126.2
2480.82.00250.050	50	100	150
2480.82.00250.063	63.5	113.5	177
2480.82.00250.080	80	130	210
2480.82.00250.100	100	150	250

Initial spring force
versus charge pressure

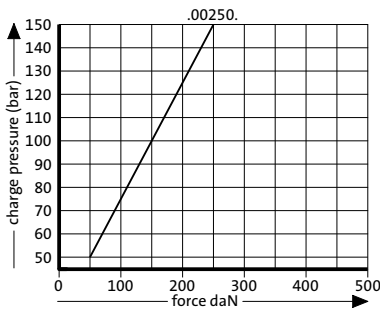

Spring force Diagram displacement versus stroke rise

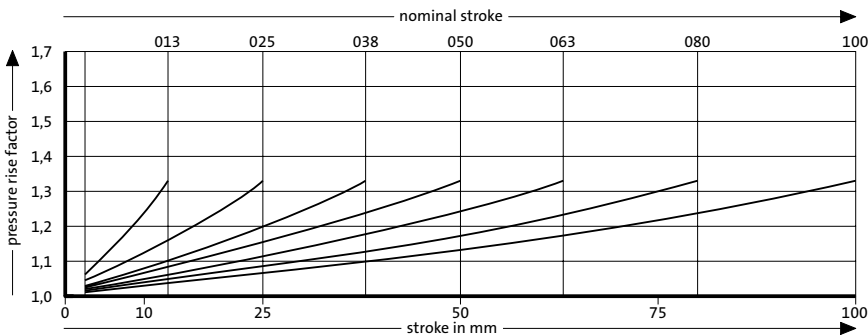

Pressure rise factor accounts for displacement but not external influences!