




GAS SPRING WITH MALE FIXING THREAD, POWERLINE

Note:
Initial spring force at 150 bar = 920 daN

Order No for spare parts kit: 2487.12.01000

Pressure medium: Nitrogen N₂
Max. filling pressure: 150 bar
Min. filling pressure: 25 bar
Working temperature: 0°C to +80°C
Temperature related force increase: ± 0.3%/°C
Max. recommended extensions per minute:
approx. 50 to 100 (at 20°C)
Max. piston speed: 1.6 m/s


2487.82.01000.

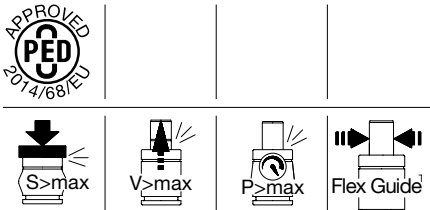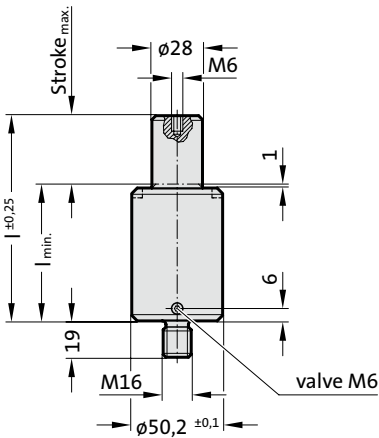


2487.82.01000.
Gas spring with male fixing thread,
POWERLINE

Order No	Stroke _{max.} (s)	l _{min.}	l
2487.82.01000.013	13	51	64
2487.82.01000.016	16	54	70
2487.82.01000.019	19	57	76
2487.82.01000.025	25	63	88
2487.82.01000.032	32	70	102
2487.82.01000.038	38	76	114
2487.82.01000.050	50	88	138
2487.82.01000.063	63	101	164
2487.82.01000.075	75	113	188
2487.82.01000.080	80	118	198
2487.82.01000.100	100	138	238
2487.82.01000.125	125	163	288

Initial spring force
versus charge pressure

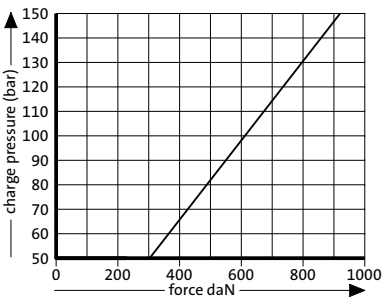

Spring force Diagram displacement versus stroke rise

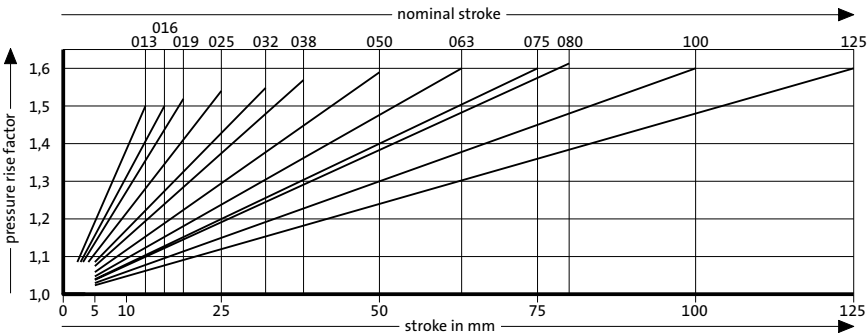

Pressure rise factor accounts for displacement but not external influences!