


COMPACT GAS SPRING

Note:
Initial spring force at 150 bar = 420 daN

Worn gas springs cannot be repaired, they have to be replaced completely.

- Pressure medium: Nitrogen N₂
- Max. filling pressure: 150 bar
- Min. filling pressure: 25 bar
- Working temperature: 0°C to +80°C
- Temperature related force increase: ± 0.3%/°C
- Max. recommended extensions per minute: approx. 50 to 100 (at 20°C)
- Max. piston speed: 0.8 m/s

2490.14.00420.

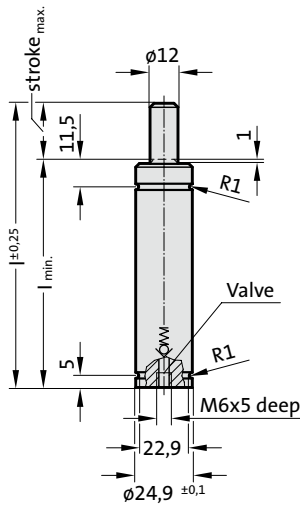


2490.14.00420.


Compact gas spring

Order No	Stroke _{max.} (s)	l _{min.}	l
2490.14.00420.006	6	50	56
2490.14.00420.010	10	60	70
2490.14.00420.016	16	75	91
2490.14.00420.025	25	95	120
2490.14.00420.032	32	108	140
2490.14.00420.040	40	125	165
2490.14.00420.050	50	145	195

Initial spring force
versus charge pressure

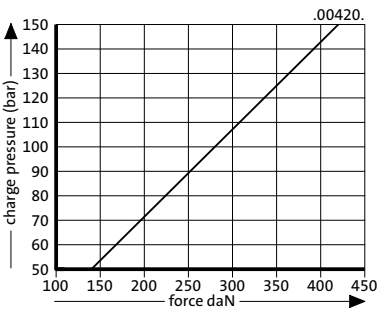

Spring force Diagram displacement versus stroke rise

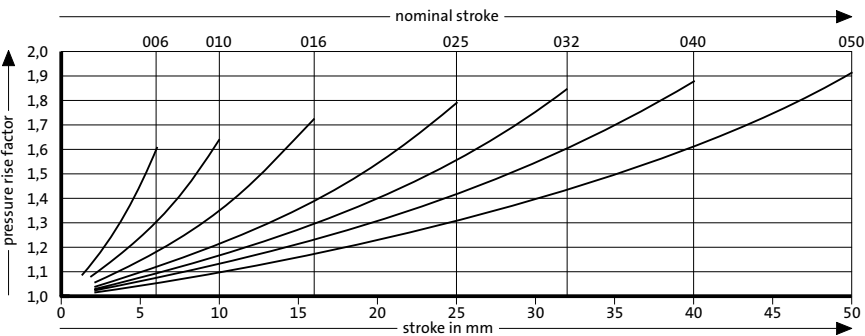

Pressure rise factor accounts for displacement but not external influences!