


PUNCH, BLANK, WITH EJECTOR PIN, ISO 8020

2701.

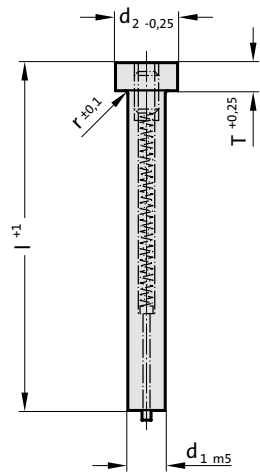


2701. Punch, blank, with ejector pin, ISO 8020

d_1 / Order No	d_2	r	T	l / (Order Code character)	71 (D)	80 (E)	90 (F)	100 (G)	120 (J)
5 / (3)	8	0.3	5		●	●	●	●	●
6 / (4)	9	0.3	5		●	●	●	●	●
8 / (5)	11	0.3	5		●	●	●	●	●
10 / (6)	13	0.3	5		●	●	●	●	●
13 / (7)	16	0.4	5		●	●	●	●	●
16 / (8)	19	0.4	5		●	●	●	●	●
20 / (9)	23	0.4	5		●	●	●	●	●
25 / (10)	28	0.4	5		●	●	●	●	●
32 / (11)	35	0.4	5		●	●	●	●	●

Ordering Code (example):

2701.8G



Length: l
100 mm
Diameter: d_1
16 mm
Type:
ISO
Execution:
blank
Punch:
with ejector pin

Order Code character
= (G)
Order No
= (8)
Order No
= (1)
Order No
= (0)
= 27

Material:

HSS
Hardness:
Shaft 64 ± 2 HRC
Head 52 ± 5 HRC

Execution:

Punch head hot upset-forged. Shoulder and shaft fine ground.
Special dimensions on request.