


**PUNCH, STEPPED, RECTANGLE WITH RADIUSSED CORNERS,
WITH EJECTOR PIN, ISO 8020**



2751.

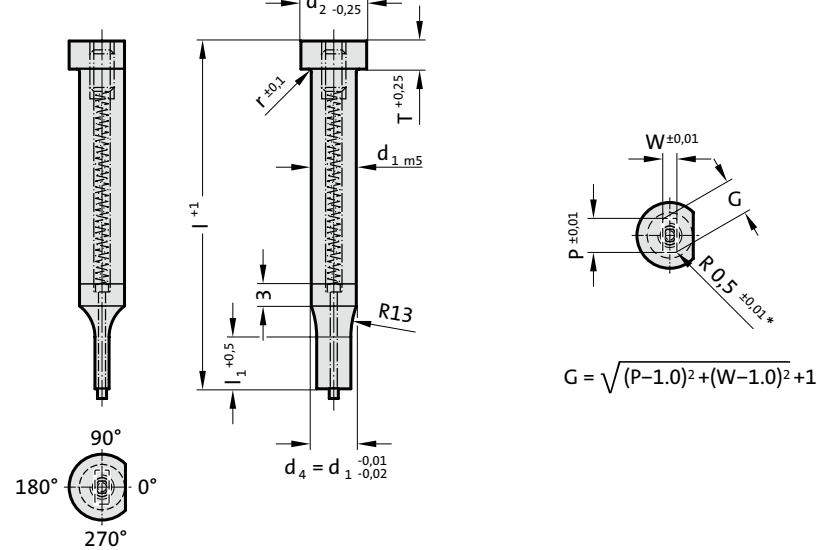

2751. Punch, stepped, rectangle with radiussed corners, with ejector pin, ISO 8020

d ₁ / Order No	d ₂	W _{min}	G _{max}	l ₁ / Order No	r	T	l / (Order Code character)	71 (D)	80 (E)	90 (F)	100 (G)	120 (J)
5 / (3)	8	2	4.9	13 (3) 19 (4)	0.3	5		●	●	●	●	●
6 / (4)	9	2.5	5.9	13 (3) 19 (4)	0.3	5		●	●	●	●	●
8 / (5)	11	4	7.9	19 (4) 25 (5)	0.3	5		●	●	●	●	●
10 / (6)	13	4	9.9	19 (4) 25 (5)	0.3	5		●	●	●	●	●
13 / (7)	16	6	12.9	19 (4) 25 (5)	0.4	5		●	●	●	●	●
16 / (8)	19	8	15.9	19 (4) 25 (5)	0.4	5		●	●	●	●	●
20 / (9)	23	10	19.9	19 (4) 25 (5)	0.4	5		●	●	●	●	●
25 / (10)	28	12	24.9	19 (4) 25 (5)	0.4	5		●	●	●	●	●
32 / (11)	35	16	31.9	25 (5) 30 (6)	0.4	5		●	●	●	●	●

Material:

HSS

Hardness:

Shaft 64 ± 2 HRC

Head 52 ± 5 HRC

Execution:

Punch head hot upset-forged. Shoulder, shaft and punch shape fine ground.


The anti-rotation surface parallel to P = 0° as standard.

Special dimensions on request.

* For other radius options, see standardised special shapes.

Ordering Code (example):

2751.9F4.1550.1150.A

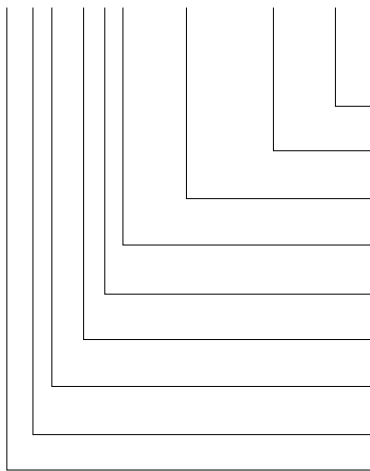

Angle: 0°	Order Code character = (A)
Shape: rectangle with radiused corners, Width W W = 11,5 mm	Order Code character = (F)
Shape: rectangle with radiused corners, Length P P = 15,5 mm	Order Code character = (4)
Punch cutting length: l₁ 19 mm	Order No = (1)
Length: l 90 mm	Order No = (9)
Diameter: d₁ 20 mm	Order No = (5)
Type: ISO	
Execution: rectangle with radiused corners	
Punch: with ejector pin	