


# LIFTING FLANGE WITH BOLT WITH SAFETY RING, WITH FEATHER KEY, TO CNOMO STANDARD



2133.13.

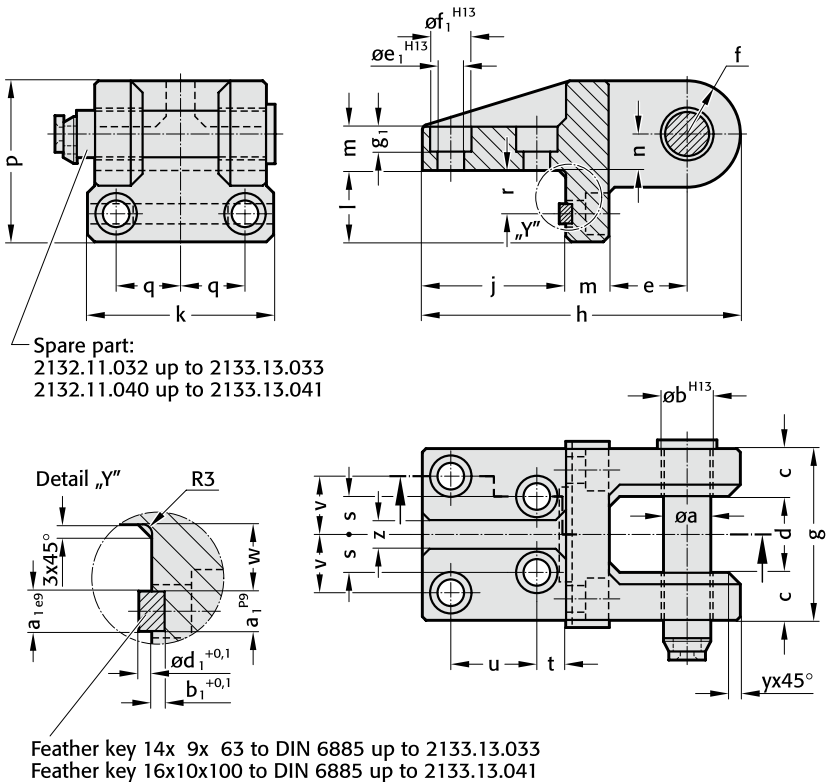

**Note:**  
Order No for spare part bolt with safety ring:  
2132.11.032 for 2133.13.033  
2132.11.040 for 2133.13.041

Feather key to DIN 6885:  
14x9x63 up to 2133.13.033  
16x10x100 up to 2133.13.041

## 2133.13. Lifting flange with bolt with safety ring, with feather key, to CNOMO Standard

| Order No    | max. carrying capacity<br>(2 lifting flanges) [kg]* | g  |    |    |    |    |    |     |     |     |     |    |    |    |     |    |    |    |    |    |
|-------------|-----------------------------------------------------|----|----|----|----|----|----|-----|-----|-----|-----|----|----|----|-----|----|----|----|----|----|
|             |                                                     | a  | b  | c  | d  | e  | f  | H13 | h   | j   | k   | l  | m  | n  | p   | q  | r  | s  | t  | u  |
| 2133.13.033 | 8,000                                               | 32 | 33 | 35 | 55 | 55 | 36 | 125 | 221 | 100 | 135 | 50 | 30 | 25 | 111 | 48 | 30 | 28 | 20 | 60 |
| 2133.13.041 | 12,600                                              | 40 | 41 | 50 | 60 | 60 | 45 | 160 | 270 | 125 | 180 | 60 | 40 | 35 | 140 | 65 | 35 | 40 | 30 | 70 |

\*The maximum permissible load capacity is to be calculated such that two lifting flanges one their own are capable of carrying or turning the tool.