
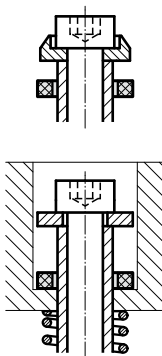


PODKŁADKA AMORTYZACYJNA

2450.

Przykład zabudowy



Material:

Polyurethan (FIBROFLEX®)

Wykonanie:

2450.6. (90 Shore A) produkt dostępny z magazynu

2450.5. (80 Shore A) i

2450.7. (95 Shore A) produkt dostępny na żądanie

2450. Podkładka amortyzacyjna

d ₁	d ₂	s	d ₁	d ₂	s	d ₁	d ₂	s
6,4	16	3	21	30	5	32	49	8
11	17	3	13,5	32	4	17	50	6
8,5	20	3	25	32	6	26	50	6
14	23	4	18	32	7	37	53	8
12	24	5	21	35	7	32	60	10
10,5	15	4	23,5	34	4	17	63	6
10,5	25	4	26	35	6	37	65	10
13	19	4	17	38	5	42	70	10
13	25	4	21	38	6	21	80	10
14	26	5	13,5	40	5	21	100	10
15,5	23	4	32	40	6	27	125	10
17	26	4	27	41	7			
18	27	4	31	42	6			
22	28	6	37	46	6			

Przykład zamówienia:

Podkładka amortyzacyjna	=2450.
Twardość Shore A MAT	90 Shore A = 6.
Średnica wewnętrzna d ₁	23.5 mm = 23.
Średnica zewnętrzna d ₂	34 mm = 034.
Grubość s	4 mm = 04
Numer katalogowy	=2450. 6. 23.034. 04