



GAS SPRING DS MOUNTING VARIATIONS


2480.007.07500

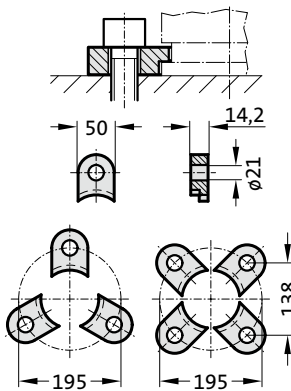


2480.008.07500³⁾

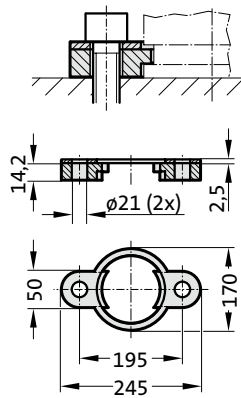


2480.011.07500

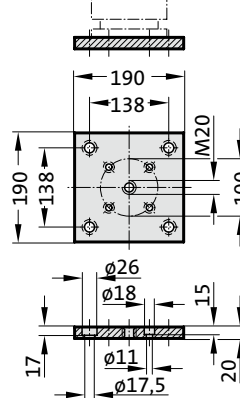


2480.011.07500.2

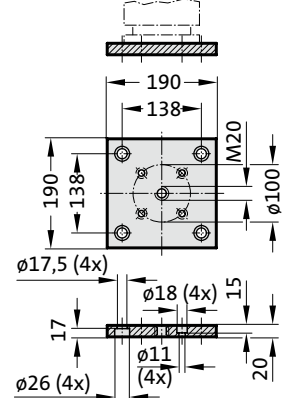


2480.011.03.07500

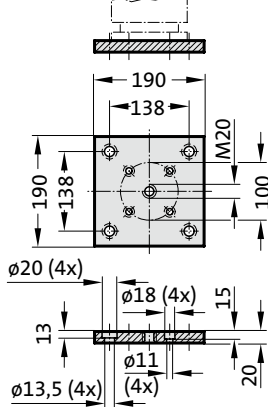


2480.011.03.07500.2

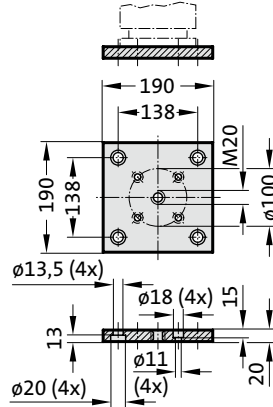


2480.022.07500

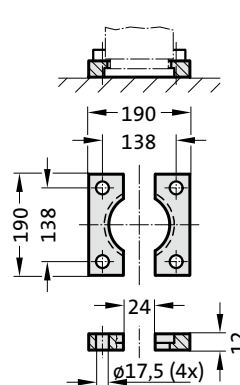


2480.055.07500

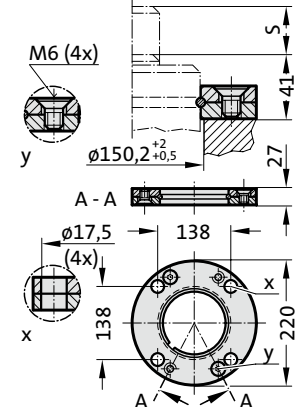

2480.057.07500

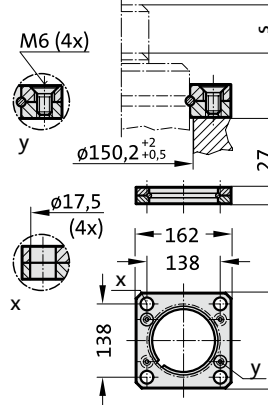

2480.064.07500⁴⁾

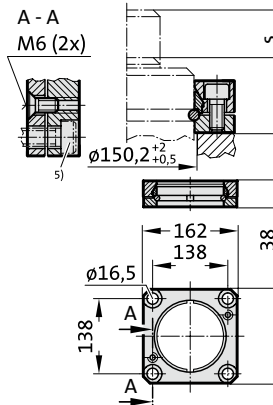

Note:

- ³⁾ Not for use with composite connection.
- ⁴⁾ Square collar flange, non-rotating, fixing for composite connection.
- ⁵⁾ Machine screws with hexagonal socket (compact head recommended)